

# pco.4000

## cooled digital 14bit CCD camera system

- superior resolution (4008x2672pixel)
- 14bit dynamic range
- fast image recording - 128MB/s
- image memory in camera (camRAM up to 4GB)
- excellent low noise of  $16e^-$  rms @ 8MHz
- thermoelectrical cooling of  $-45^{\circ}\text{C}$  vs. ambient
- standard interfaces (IEEE1394, camera link, ethernet)
- UV sensitive & color CCD image sensor available



This PCO brochure is presented to you by:  
Intelligent Laser Applications GmbH, Karl-Heinz-Beckurts-Strasse 13, D-52428 Juelich  
Phone +49.(0)2461.690-430, Fax +49.(0)2461.690-439, info@ila.de, www.ila.de  
ILA is a registered PCO system integrator and third party software provider



# pco.4000

This high performance 14bit CCD camera system comprises advanced CCD and electronics technology. With the new approach to integrate the image memory (camRAM) into the camera itself, it enables unmatched fast image recording with 128MB/s. The system features thermo-electrical cooling (down to  $-45^{\circ}\text{C}$  vs. ambient), an excellent high resolution (4008 x 2672pixel) and low noise (down to  $16e^{-}$  rms). It consists of a compact camera with an external intelligent power supply. The image data are transferred via customer selectable standard data interfaces to a computer (IEEE 1394 ("firewire"), camera link, ethernet). The available exposure times range from  $5\mu\text{s}$  to 49days.

## technical data

	unit	setpoint	pco.4000
resolution (hor x ver) <sup>1</sup>	pixel	@normal/ @extended mode	4008x2672 4072x2720
pixel size (hor x ver)	$\mu\text{m}^2$		9.0 x 9.0
sensor format/ diagonal	$\text{mm}^2$ / mm		36.6 x 24.5 / 44.0
peak quantum efficiency	%	@ 500nm typical	50
full well capacity of CCD	$e^{-}$		60 000
image sensor			KAI-11000CM
maximum dynamic range	dB		71
dynamic range A/D <sup>2</sup>	bit		14
readout noise	$e^{-}$ rms	@8 / 16 / 32MHz	16 / 22 / 30
imaging frequency, frame rate	fps	@full frame	5.0
pixel scan rate	MHz		2 x 8 / 2 x 16 2 x 32
A/D conversion factor	$e^{-}$ /count		3.3
spectral range	nm	normal / UV sensitive	320..1000 200..1000
exposure time	s		$5\mu\text{s}$ ..49days
anti-blooming factor		typical	>300
smear	%		0.01
binning horizontal	pixel		1, 2
binning vertical	pixel		1, 2, 4, 8
dark current	$e^{-}$ /pixel·s	@20 °C typical @-20 °C typical	0.7/ 0.02
region of interest	pixel		1, 2, 3, 4..n

This PCO brochure is presented to you by:  
Intelligent Laser Applications GmbH, Karl-Heinz-Beckurts-Strasse 13, D-52428 Juelich  
Phone +49.(0)2461.690-430, Fax +49.(0)2461.690-439, info@ila.de, www.ila.de  
ILA is a registered PCO system integrator and third party software provider




## technical data

non linearity	%	full temperature range	<2
uniformity darkness DSNU <sup>3</sup>	e <sup>-</sup> rms	@ 90% center zone	<20
uniformity brightness PRNU <sup>4</sup>	%	typical	2
trigger, auxiliary signals		internal/ external	software / TTL level
power consumption	W	typical/ maximum	25 / 50
power supply	VAC		90..260
mechanical dimensions camera (w x h x l)	mm <sup>3</sup>		84 x 66 x 175
mechanical dimensions power supply (w x h x l)	mm <sup>3</sup>		135 x 51 x 195
weight	kg		1.9
operating temperature range	°C		+5..+40
operating humidity range	%		10..90
storage temperature range	°C		-20..+70
optical input			Nikon f-mount
optical input window			fused silica
data interface			IEEE1394, camera link, ethernet
CE certified			yes
cooled CCD	°C	versus ambient temperature	Δ-45
cooling method			2 stage Peltier cooler with forced air cooling
interframing time	ns	full image	260

- [1] horizontal versus vertical  
 [2] Analog-to-Digital-converter  
 [3] dark signal non-uniformity  
 [4] photo reponse non-uniformity

This PCO brochure is presented to you by:  
 Intelligent Laser Applications GmbH, Karl-Heinz-Beckurts-Strasse 13, D-52428 Juelich  
 Phone +49.(0)2461.690-430, Fax +49.(0)2461.690-439, info@ila.de, www.ila.de  
 ILA is a registered PCO system integrator and third party software provider

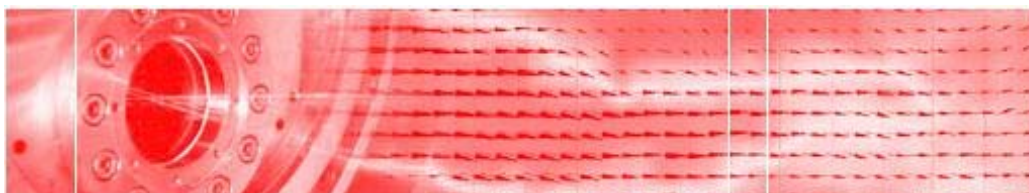

**software:**

Camware software for camera control, image acquisition and archiving of images in various file formats, WindowsXP and later, 32bit-dynamic link library (DLL) is available for user customisation and integration on PC platforms (software development kit - SDK), software is operational in either single mode or with built-in recorder functions, drivers for popular third party software packages are available (see website)

**options:**

CCD image sensor in color & UV sensitive version  
custom-made versions  
camRAM available in: 512MB, 1GB, 2GB & 4GB

**frame rate table [frames per second]**

pixelclock	10MHz	20MHz	40MHz
used A/D converters	1 / 2	1 / 2	1 / 2
full frame	0.7 / 1.4	1.4 / 2.7	2.7 / 5.0
2x2 binning	1.4 / 2.7	2.7 / 5.2	5.2 / 9.2
2x8 binning	5.0 / 9.2	9.2 / 15.7	15.7 / 24.0
ROI 2048x2048pixel	0.9 / 1.8	1.8 / 3.4	3.4 / 6.3
ROI 1600x1200pixel	1.5 / 3.0	3.0 / 5.6	5.6 / 9.8
ROI 1280x1024pixel	1.8 / 3.4	3.4 / 6.4	6.4 / 11.1
ROI 640x480pixel	3.6 / 6.6	6.7 / 11.7	11.8 / 18.9

## areas of application

laser induced fluorescence ■ high resolution microscopy ■ luminescence microscopy ■ electron microscopy ■ fluorescence spectroscopy (up to NIR) ■ bioluminescence ■ chemoluminescence ■ low light level imaging ■ imaging of bio markers (e.g. green fluorescent protein, GFP) ■ time resolved spectroscopy ■ spray analysis ■ hydrodynamics ■ electrophoresis ■ absorption & luminescence spectroscopy ■ imaging of potential sensitive dyes (Neuroscience) ■ night vision ■ security ■ astronomy ■ combustion process analysis ■ gel imaging ■ fuel injection

## contact

PCO AG  
Donaupark 11  
93309 Kelheim, Germany

fon +49 (0)9441 2005 50  
fax +49 (0)9441 2005 20  
info@pco.de  
www.pco.de

The Cooke Corporation  
1091 Centre Road, Suite 100  
Auburn Hills, Michigan 48326-2670  
USA

fon +1 248 276 8820  
fax +1 248 276 8825  
info@cokecorp.com  
www.cookecorp.com

pco.4000 product sheet 07/2004b  
subject to changes without prior notice © PCO AG, Kelheim

This PCO brochure is presented to you by:  
Intelligent Laser Applications GmbH, Karl-Heinz-Beckurts-Strasse 13, D-52428 Juelich  
Phone +49.(0)2461.690-430, Fax +49.(0)2461.690-439, info@ila.de, www.ila.de  
ILA is a registered PCO system integrator and third party software provider

